


6" Dia.

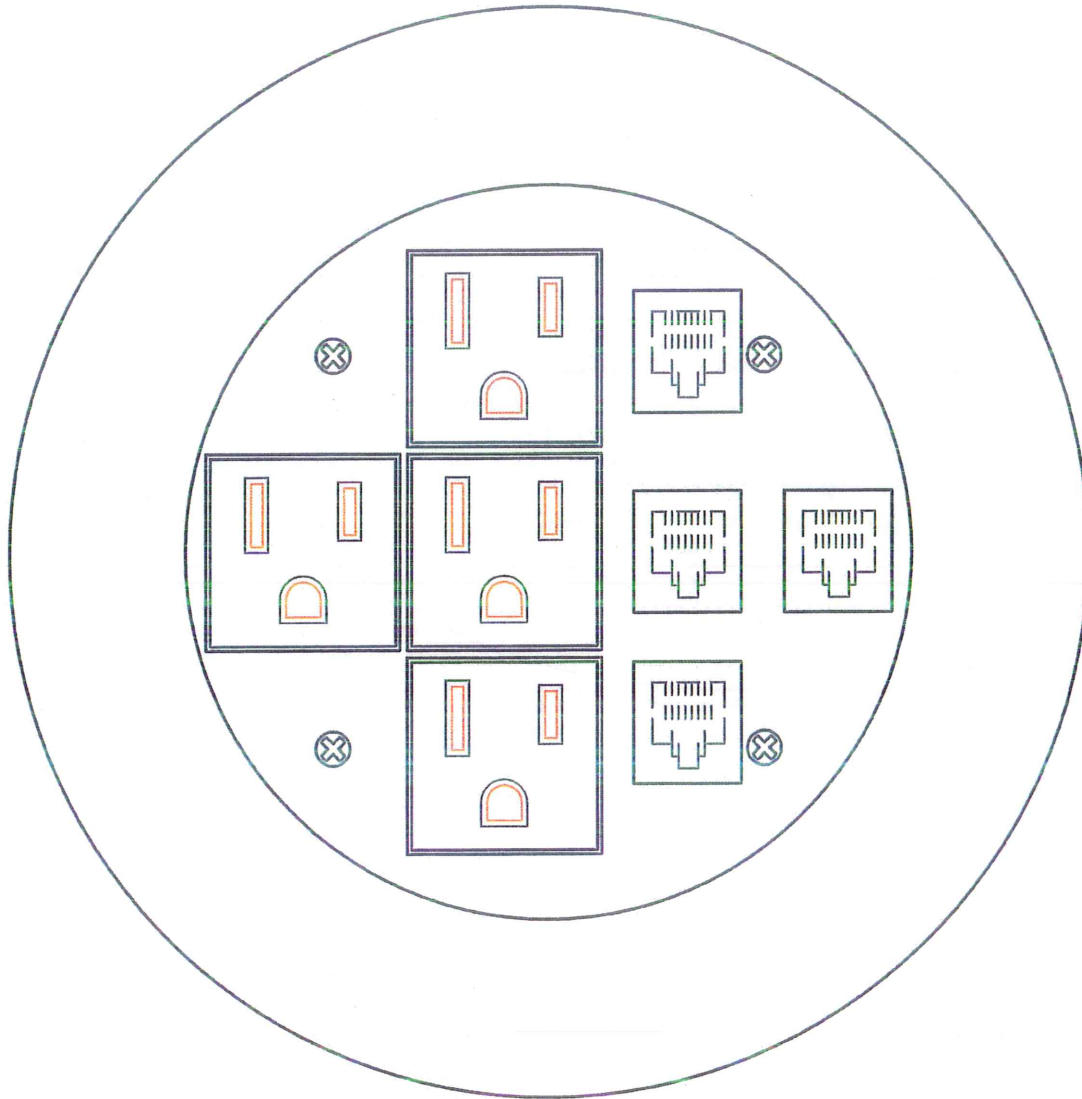

MOI-PWR4-COMM4

4x15Amp single receptacles and 4 openings for COMM jacks
 (openings suitable for all manufacturers Keystone style jacks)
 COMM jacks not supplied or installed by Nocom Inc.

NOTE:

Single receptacles shall be 5-15RA . **5-20RA available.**
 Keystone style openings or blanks or CSA/UL Recognized/
 Classified or Listed comm jacks.

ORDERING INFO-(SEE ABBREVIATIONS)

SLAB THICKNESS _____
 RECEPT.TYPE/colour _____
 DATA MANUF./colour _____
 COVER TYPE _____

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NOCOM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NOCOM IS PROHIBITED.


		DIMENSIONS ARE IN MM TOLERANCES: ANGLES: ± DEGREE LINEAR: ± MM (UNLESS SPECIFIED)	NAME	DATE	JOB TITLE:
			TJP	10-05-14	
			CHECKED		
			ENG. APPR.		
		MATERIAL	Q.A.		COMMENTS:
		See Variant Table			
NEXT ASST	USED ON	FINISH			
APPLICATION		DO NOT SCALE DRAWING			

MULTICONNECT™
 by **NOCOM®**
 888-225-2478 www.nocom.ca

SIE	DWG. NO.	REV.
A	MOI-PWR4-COMM4	R5

SCALE=N.T.S. WEIGHT: SHEET 1 OF 3

Residential Outlet flush with carpet or other 1/4" floor finish

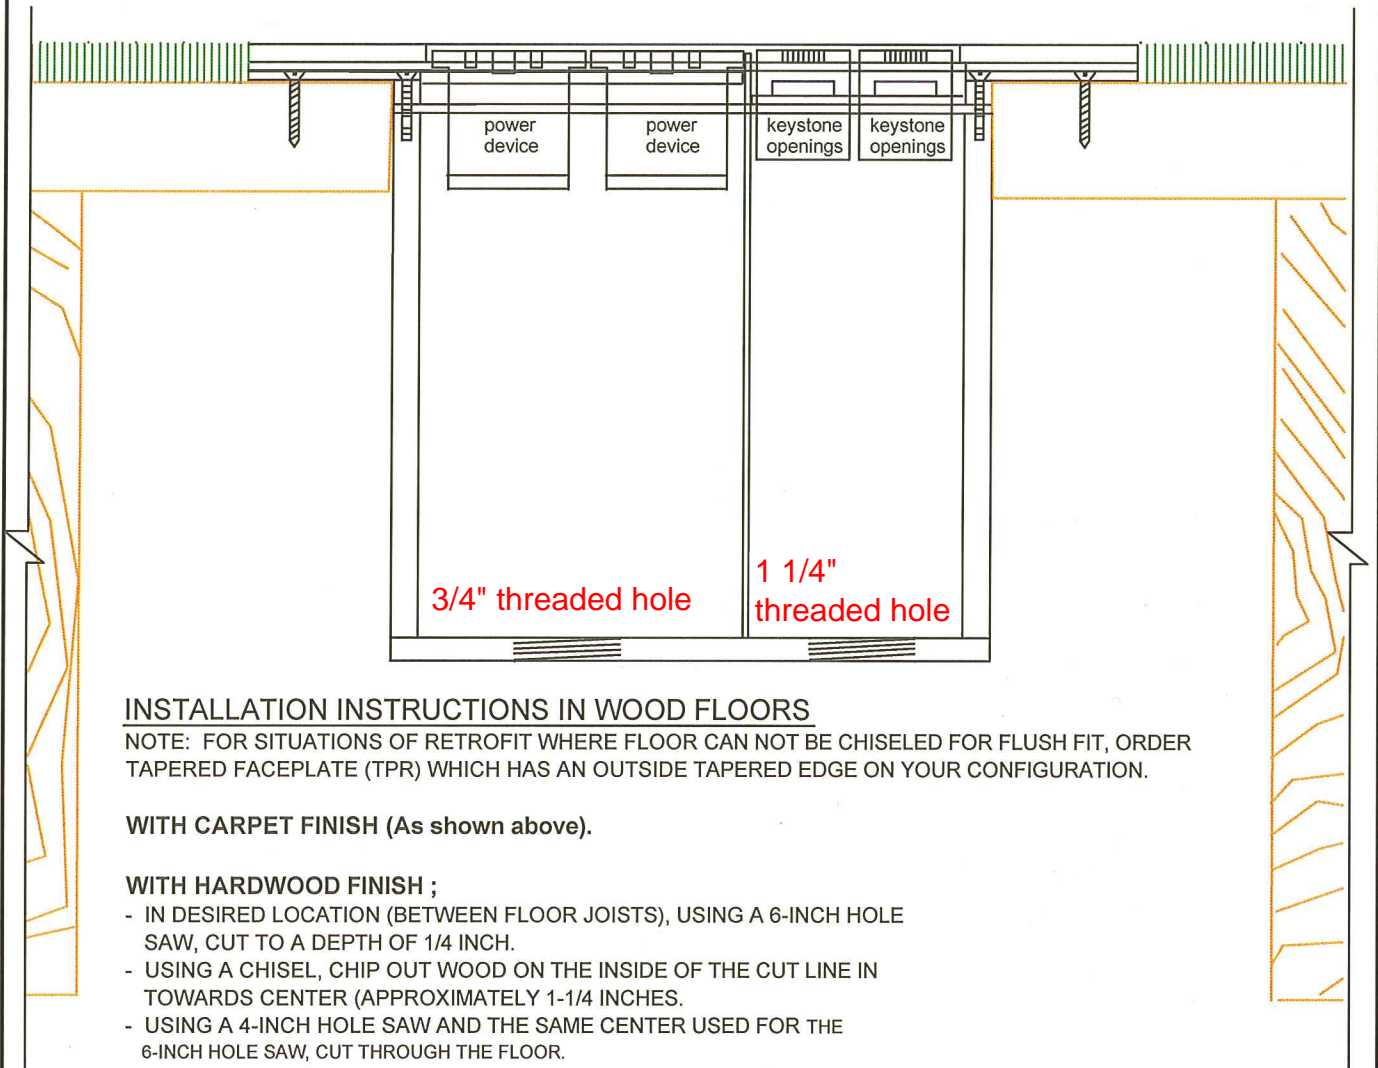

INSTALLATION INSTRUCTIONS IN WOOD FLOORS

NOTE: FOR SITUATIONS OF RETROFIT WHERE FLOOR CAN NOT BE CHISELED FOR FLUSH FIT, ORDER TAPERED FACEPLATE (TPR) WHICH HAS AN OUTSIDE TAPERED EDGE ON YOUR CONFIGURATION.

WITH CARPET FINISH (As shown above).

WITH HARDWOOD FINISH ;

- IN DESIRED LOCATION (BETWEEN FLOOR JOISTS), USING A 6-INCH HOLE SAW, CUT TO A DEPTH OF 1/4 INCH.
- USING A CHISEL, CHIP OUT WOOD ON THE INSIDE OF THE CUT LINE IN TOWARDS CENTER (APPROXIMATELY 1-1/4 INCHES).
- USING A 4-INCH HOLE SAW AND THE SAME CENTER USED FOR THE 6-INCH HOLE SAW, CUT THROUGH THE FLOOR.

WITH CERAMIC TILE FINISH;

- INSTALL MULTICONNECT UNIT BEFORE TILE INSTALLATION.

MOUNTING (FOR ALL TYPES) ;

- REMOVE TOP COVER TO TOTALLY EXPOSE CONFIGURATION PLATE.
- REMOVE CONFIGURATION PLATE (4 SCREWS) TO EXPOSE MOUNTING PLATE WITH MOUNTING HOLES
- FASTEN THE UNIT TO THE FLOOR WITH #6 STAINLESS STEEL WOOD SCREWS
- CONNECT WIRES TO SUPPLIED CONNECTORS.
- RE-ASSEMBLE CONFIGURATION PLATE TO UNIT
- INSERT COVER PLATE.

ORDERING INFO-(SEE ABBREVIATIONS)

SLAB THICKNESS _____
 RECEPT.TYPE/colour _____
 DATA MANUF./colour _____
 COVER TYPE _____



FROM:



105 WILLOWLEA ROAD,
 OTTAWA ONT., CANADA
 KOA-110
 TEL.(613) 831-8102 FAX(613) 831-8103
 TOLL FREE 1-888-225-2478 e-mail info@nocom.ca
 web www.multiconnect.ca

JOB TITLE:

DRAWN BY:
tjp

APPROVED:
R.B.

DWG #

PWR4 COMM4
 RESIDENTIAL
 CROSS-SECTION

DATE:
06-04-20

SCALE:
n.t.s.

issue-R0